









Parameters: BWR Grade For General Purpose

ISI: IS 303:1989

Moisture Content(%): 5%-15%

Glue Shear Strength_Dry: >1350N

Water Resistance Test: Excellent

Adhesion of Plies: Excellent

Modulus of Elasticity [N/mm2]

Across the Grain: >2500 Along the Grain: >5000

Modulus of Rapture[N/mm2]

Across the Grain >20
Along the Grain >40
Water Absorption: <3%

Standard Thickness [mm]: 4,6,9,12,16,18,19 & 25

 $Standard\ Sizes[mm\ x\ mm]: \qquad 2440x1220,2440x920,2140x1220,$

2140x920,1840x1220,1840x920

Special Features

Process Compliant: ISO 9001; ISO 14001 & OHSAS18001

Globe Ply BWR/MR

ISI No - 303:1989

For Furniture, Paneling, Wardrobe, Cabinet, Partitions etc. in Interiors



BOILING WATER RESISTANT








Globe Fire Retardant Ply

ISI No - 5509:2000

For Use in Kitchen, Balconies, Stair Ways, Open Air Roof System.



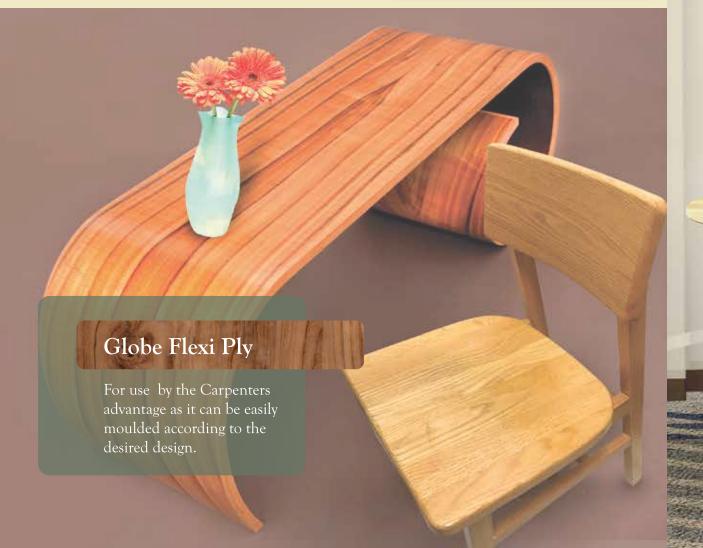

Globe Decorative Ply For Wall Paneling, Kitchen Paneling, Table Tops, Partition Walls, Cup Racks, Ceiling Finish, Speaker Cabinets.



Globe Block Board/BWP

ISI No - 1659:2004

Shutters.

For all type of furniture in load bearing horizontal panel applications apart from Domestic Use & Office Use for Racks, Shelves,

Globe Block Board/BWR & MR

ISI No - 1659:2004

For Partitions, Shutters, Wardrobe, Frames & Roofing etc.

Modulus of Elasticity [N/mm2] : >4000

Parameters: Block Board MR Grade Water Absorption: <2%

ISI: S 1659:2004 Nail Holding Strength: >500N

Moisture Content(%): 5% to 15% Screw Holding Strength: >100Kg

Water Resistance Test: Excellent Standard Thickness [mm]: 19 & 25

Adhesion of Plies: Excellent Standard Sizes[mm x mm]: 2440x1220,2440x920,2140x1220,

2140x920,1840x1220,1840x920

Special Fo

Process Compliant: ISO 9001; ISO 14001

& OHSAS18001





Globe Film Coated Shuttering Plywood

ISI No - 4990:1993

For use in Concrete Shuttering & Frame Work In various Civil Construction. It offers high re-usable value under careful & proper handling of materials.



Parameters: Film Faced Shuttering ISI: IS 4990: 1993
Moisture Content(%): 5% to 15%
Glue Shear Strength_Dry: >1350N

Water Resistance Test: >1350N

Excellent

Adhesion of Plies: Excellent

Modulus of Elasticity [N/mm2]

Across the Grain: 400 Along the Grain: 7500

Modulus of Rapture[N/mm2]

Across the Grain: >30
Along the Grain: >50

Tensile Strength[N/mm2]: >60
Water Absorption: <3%
Standard Thickness [mm]: 9 & 12
Standard Sizes[mm x mm]: 2440x1220

Special Features

Process Compliant : ISO 9001; ISO 14001 &

OHSAS18001

Flush Door

ISI No - 2202(Part-1):1999

Globe Flush Door is a premium product made from selected veneers, well seasoned wood and is bonded with PF Resin. To improve durability, chemical treatment is being given and is pressed under high pressure and temperature to make the Flush Door resistant to termite, wood borers and cyclic changes.

It is ideally suitable for both indoor & outdoor, domestic and commercial establish-

ments available in 3 types-1side decorative, both side decorative & non-decorative respectively.

It is structurally and dimensionally stable 100% BWP product available in Standard Sizes as well as Standard Thickness per end users requirement.





Globe Membrane Door

For interior design door with lifelong dimensional stability.

Product Features

- Interior Design Doors.
- Processed by CNC Computerized machinery for design accuracy.
- Preservative treated & steam Heated Kiln seasoned hardwood, battens for stability & durability.
- Select hardwood for stiffness & strength.
- PF resin for durability & boiling water proof properties.
- Free from Fungi, Borers, Insects & Termites.
- Life Long dimensional stability.





Factory











Achievements











This is to certify that Sri Salil Saha.

Son of late Sarya Ranjan Saha, resident of Vill - Panchapath, Mathabhanga occupied First position for raising of plantation in non-forest area in the district of COOCHBESIAR.

Aridi. Procepul Clief Conservator of Foreign Hend Quarters & Wasteland Development Principal Chief Conservator of Po





isedquadars: The Mantosh Sonshi Contra, 23, Institutional Area, Lost Road New Debt 116 003 \$200.05.01



 $S.\ A.\ Plywood\ Industry\ Private\ Limited\\ \textbf{Head\ Office\ \&\ Factory}$

P. O. Pachagarh, Mathabhanga, Dist: Coochbehar, West Bengal - 736 146 Tel.: (03583) 255383/255275, Fax: (03583) 255334



www.globeply.com

Follow us on

